

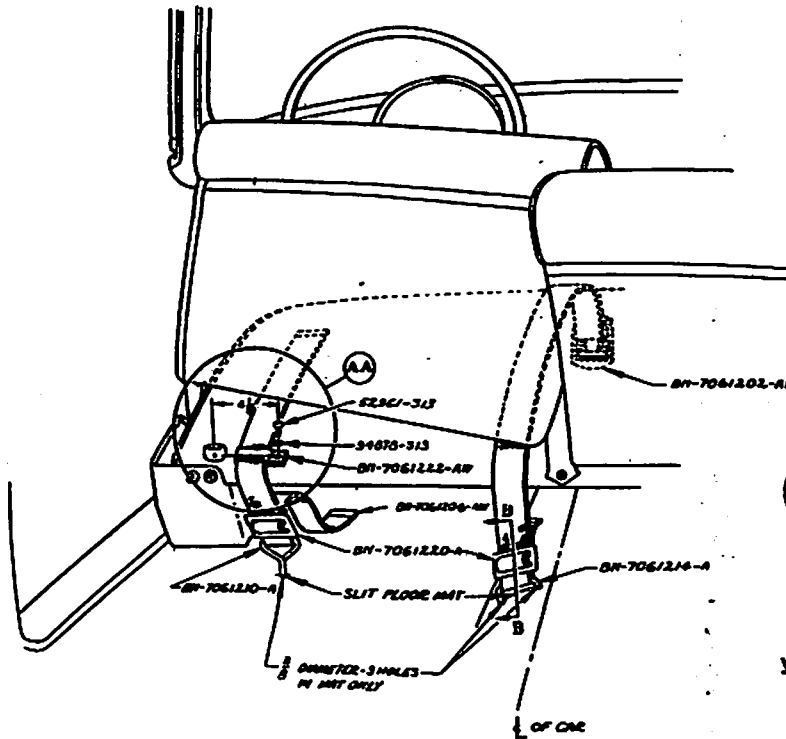


FIGURE-1

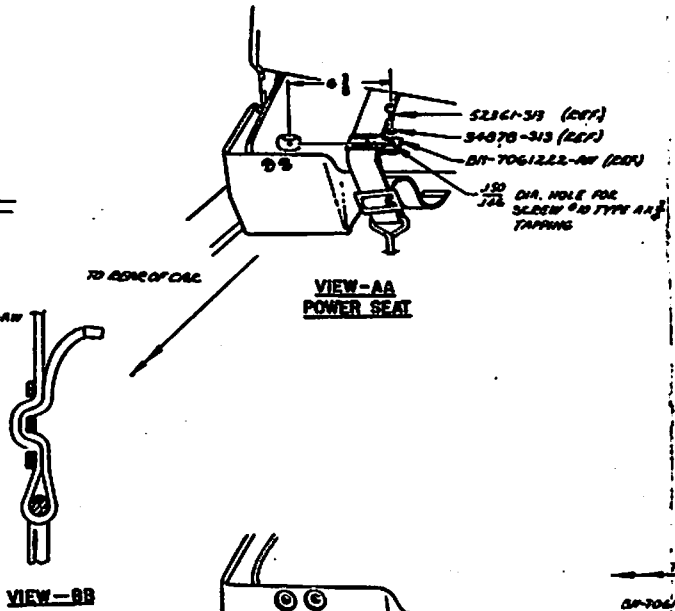


FIGURE-2A
POWER SEAT

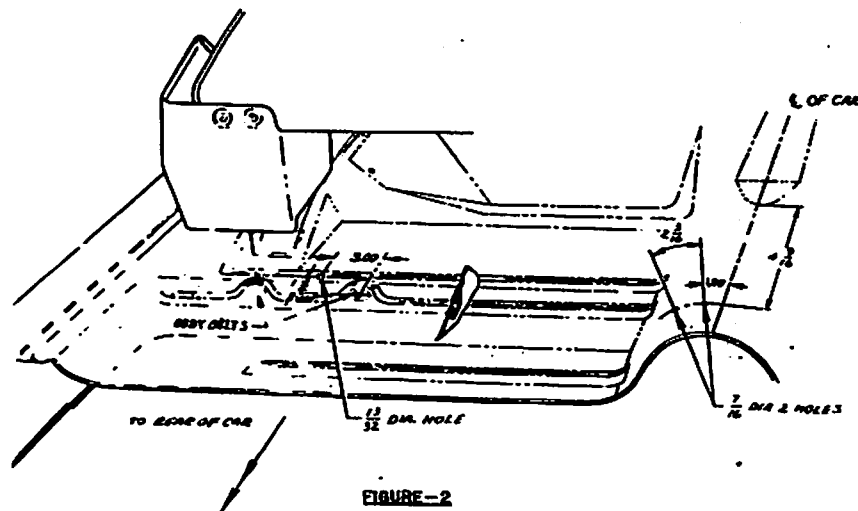


FIGURE-2

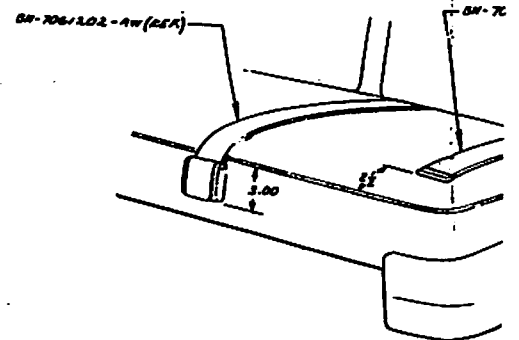


FIGURE-4



- 1 POSITION FLOOR JOINT IN EXTREME FORWARD POSITION.
- 2 FOLD FORWARD POSITION OF INNER PLATE AND TURNED-OUT FLOOR JOINT CUSHION IN TOWARD FLARE AND IS GRASPED.
- 3 DELAY OF MANEUVERS IN HOLDING FLOOR JOINT COORDS INSIDE IN POSITION, IT WILL BE NECESSARY TO CENTER POINT SMALL EXPLODATIVE HOLES IN FLOOR JOINT AND CHECK INITIAL POSITION FROM UNDER SIDE OF FLOOR JOINT. LOCATE EXPLODATIVE HOLE FOR OUTER ANCHOR BOLT TO DIMENSIONS SHOWN IN FIGURE-2.
- 4 FOR MANUAL SCOT INSTALLATIONS, DO FOLLOW-UP FOR POWER SCOT INSTALLATIONS. DIMENSIONS FOR INNER ANCHOR BOLT HOLES ARE IDENTICAL FOR BOTH MANUAL AND POWER SCOT INSTALLATIONS, SCOT ANCHOR-6. DIMENSIONS TO BE GIVEN ON SURFACE OF INITIAL.
- 5 FROM UNDER SIDE OF THE HOLE THE ANCHOR BOLT AND FLOOR PLATE IN POSITION ON FLOOR JOINT TO CHECK THEIR FORCE AND LEFT POSITION WITH RESPECT TO THE CROSS NUMBER AS SHOWN IN FIGURE-2.
- 6 AT THE END OF THE SCOT INSTALLATION, THE SCOT PLATE SHOULD BE PLACED AGAINST THE CENTER OF THE HOLE IN ORDER TO BEHOLD THE SCOT PLATE CLEARANCE DIMENSIONS SHOWN IN FIGURE-2. AND DO NOT SHIFT DIMENSIONS. TURNED IN 300° OR 450° OF SCOT.
- 7 FOLD REAR FLOOR JOINT BACK IN ITS ORIGINAL POSITION.
- 8 DETERMINE LOCATION OF INNER AND OUTER ANCHOR BOLT HOLES THROUGH FLOOR JOINT OR ORIENT AND CUT CLOSET, SLIT AND HOLES IN JOINT, SEE FIGURE-1.
- 9 INSTALL INNER AND OUTER ANCHOR BOLT (SEE FIGURE-3). THE WELDED FLAT WASHER ON OUTER ANCHOR BOLT AND SPECIAL FLAT WASHERS (100 OUTSIDE DIAMETER) FOR INNER ANCHOR BOLT MUST BE ASSEMBLED ON TOP SURFACE OF FLOOR JOINT UNDER FLOOR JOINT.
- 10 CORRECT BOLT ASSEMBLIES TO INNER AND OUTER ANCHOR BOLTS AS SHOWN IN FIGURE-1. END OF BOLT ASSEMBLIES SHOULD BE POSITIONS TO OBTAIN THE DIMENSIONS SHOWN IN FIGURE-2 FOR GENERAL USAGE. WHEN BOLT IS BEING MOVED, OUTSIDE SHOULD BE OFF CENTER TOWARD OUTBOARD SIDE, BUT SHOULD NOT REST ON HOLE OF PEEPER. OUTBOARD BOLT LENGTH IS SHOWN IN FIGURE-1. THERE ARE TWO TYPES OF BOLT, BUT NOT IN USE.
- 11 FOR HOLES WITH SCOT SCOT JOINT OR SCOT JOINT IN THE FORWARD POSITION, INITIAL SCOT JOINT ATTACHING SCOT JOINT SIDE OF SCOT JOINT IN POSITION SHOWN IN FIGURE-1. SCOT JOINT DIMENSIONS SHOWN IN FIGURE-1 FOR MANUAL SCOT INSTALLATIONS. FOR POWER SCOT JOINT INSTALLATIONS, DIMENSIONS SHOWN IN FIGURE-1 FOR POWER SCOT JOINT INSTALLATIONS. (SEE) WITH ANCHOR BOLT INTO SCOT JOINT ATTACHED TO EXISTING SCOT. INITIAL SCOT AND WASHER TO SECURE BATHING LOOP. (BATHING LOOP IS NOT INCLUDED ON FIGURE-2 MODELS).

